



# HYPERDRIVE

AVAILABLE DECK SIZES

60" - 72"  
60" - 72" RD



# HYPERDRIVE

**NEW!**

## **VX4® Deck**

Fabricated 7 ga. steel engineered for extreme vacuum for enhanced performance and cut quality

## **Easy Serviceability**

Flip-up Seat Pan. Removable floor pan, vented pulley covers

## **Foot Operated Deck Lift**

Easily adjust the deck height between 1" - 5.5" with your foot

## **Commercial-grade Torque**

Danfoss Industrial Grade Slipper pumps and Parker TG280 wheel motors


## **SmoothTrak™ Steering**

Precision control to help trim and maneuver easily around obstacles. You will fully understand SmoothTrak™ steering when you drive ours and drive theirs

**Commercial-Grade  
Kawasaki® FX Engine**  
FX1000

## **I3M Suspension Seat**

High-back seat with adjustable armrests and 3-inch travel range

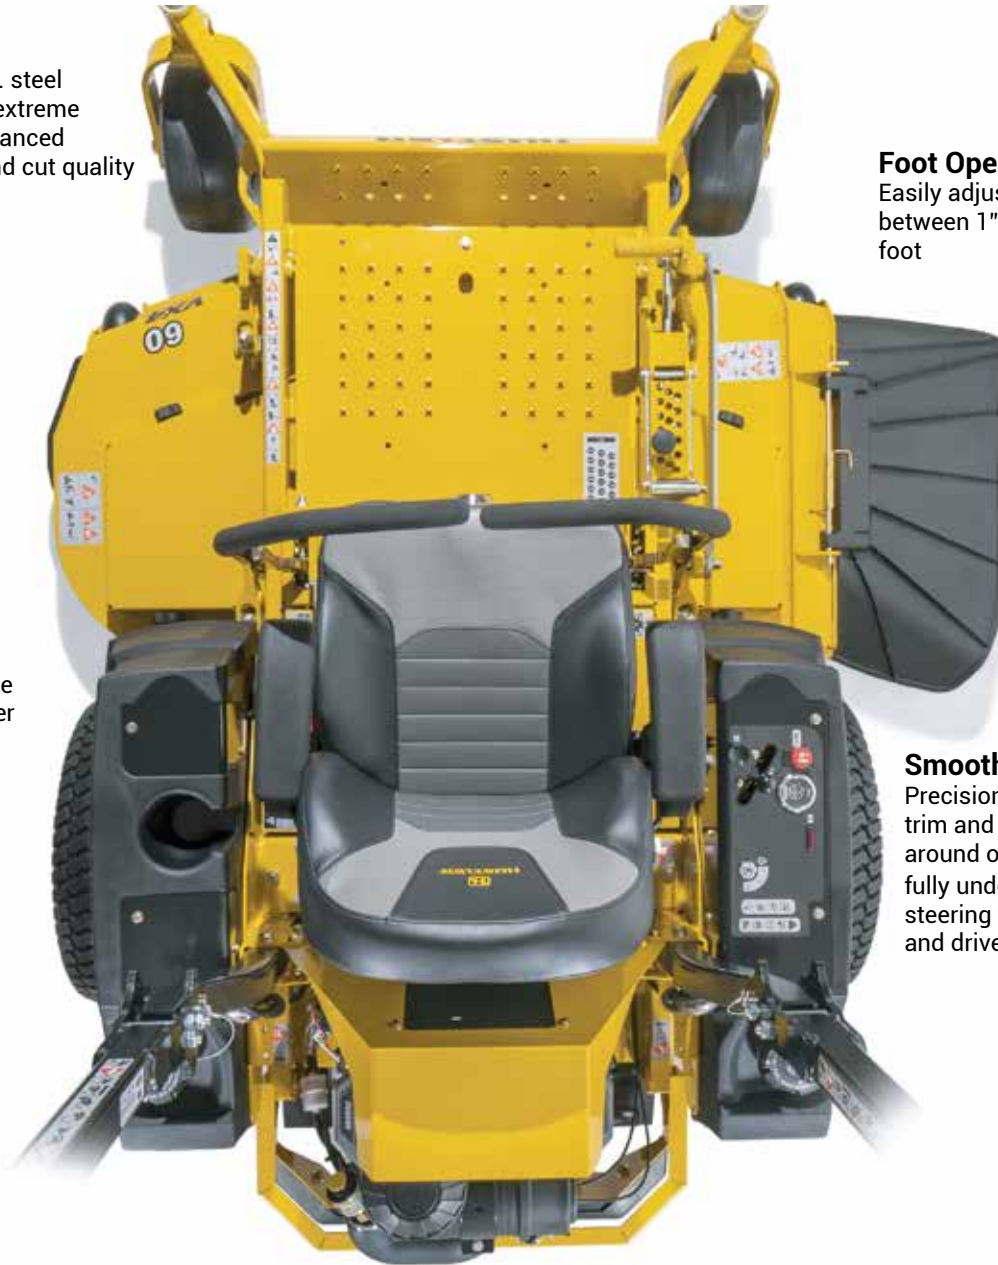



## UPGRADES FOUND ON THE HYPERDRIVE

# HYPERDRIVE

- ✔ HyperDrive® Hydro system
- ✔ Danfoss DDC-20 pumps
- ✔ Larger 26" drive tyre
- ✔ Up to 26kph

LIMITED WARRANTY  
**3** YEAR | **NO** HOUR LIMIT

OR

LIMITED WARRANTY  
**5** YEAR | **500** HOUR



## HYPERDRIVE SYSTEM

Increase the life and performance of your mower with Hustler's exclusive HyperDrive system, the largest, most durable drive system in the industry. With temperature regulation and heavy-duty components, HyperDrive will keep you operating at peak performance.

## HYPERDRIVE ACCESSORIES

- ▶ Semi pneumatic front tyres
- ▶ Steering lever extension kit
- ▶ BacVac bagger (10 bushels)
- ▶ FlexForks®
- ▶ Mulch kit
- ▶ Electric deck lift
- ▶ Rear hitch kit



9" fan & high capacity oil cooler with hot oil shuttle



Large oil reservoir



Heavy-duty Parker TG280 wheel motors



Industrial grade slipper piston pumps

INDUSTRY'S BEST WARRANTY

**5** YEAR | **3000** HOUR  
**PUMPS AND MOTORS**

# HYPERDRIVE

ENGINE	
Manufacturer	Kawasaki® FX series
	60" & 72" deck: 35HP - FX1000 60"RD & 72"RD deck: 35HP - FX1000 (Per SAE J1995)
Displacement	999cc
Cooling	Air cooled
Air Cleaner	Heavy duty canister
Engine Warranty	3 year
DRIVE SYSTEM	
Type	Dual hydrostatic
Pumps	Danfoss DDC-20
Wheel Motors	ParkerTG280
Hydraulic Lines	Stainless Parker Seal-Lok™ Technology
Reservoir Capacity	11.4L
Speed	Up to 26 kph
Parking Brakes	Patented automatic
DECKS	
Cutting Width	Side discharge: 60", 72"    Rear discharge: 60", 72"
Cutting Heights	1" - 5.5"
Deck Lift	Foot operated
Depth	5.5"
Blades	3
Blade Length	60" deck: 20.50" 72" deck: 24.50"
Blade tip speed	60" deck: 18,000    72" deck: 18,500    72" RD deck: 18,000
Spindles	Ductile cast iron with steel shaft and sealed ball bearings
Drive	Electric PTO Clutch
Construction	Fabricated 7ga.
Spindle mounts	Reinforced 7 ga. stamped disc
Impact/Trim areas	Front of deck: 11ga. formed bump bar Side of deck: 1.5" x 0.375" steel bar
CONSTRUCTION	
Frame	1.5" x 3" steel tubing
Front Axle	Fabricated with tapered roller bearings
Front Caster wheels	Mounted with tapered wheel bearings and debris cap
Front Caster forks	Fabricated 1/2" steel
GENERAL	
Seat	I3M suspension seat
Fuel Capacity	44.3 Litres
Cupholder	Yes
Front Tyre	13 x 6.5 - 6
Drive Tyre	26 x 12 - 12
DIMENSIONS	
Weight	60" deck: 697kg    60" RD deck: 728kg 72" deck: 724kg    72" RD deck: 760kg
Height	1.21m    1.87m w/ROPs
Length	60" deck: 2.26m    60" RD deck: 2.32m    72", 72" RD deck: 2.36m
Width w/chute up	60" deck: 1.68m    72" deck: 1.83m & 1.98m
Tyre width	60" & 60" RD deck: 1.45m    72" & 72" RD deck: 1.52m
Trim side	60" deck: 0.09m    72" deck: 0.23m
PRODUCTIVITY*	
Acres Per Hour	60" deck: 7.76    72" deck: 9.31



VISIT [HUSTLERMOWERS.CO.NZ](http://HUSTLERMOWERS.CO.NZ)  
and try our compare products tool

Specifications are subject to change without notice

\* Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain